


90° fitting for low reveal kit for Ambientika - code VMKSA60RFLATSW2

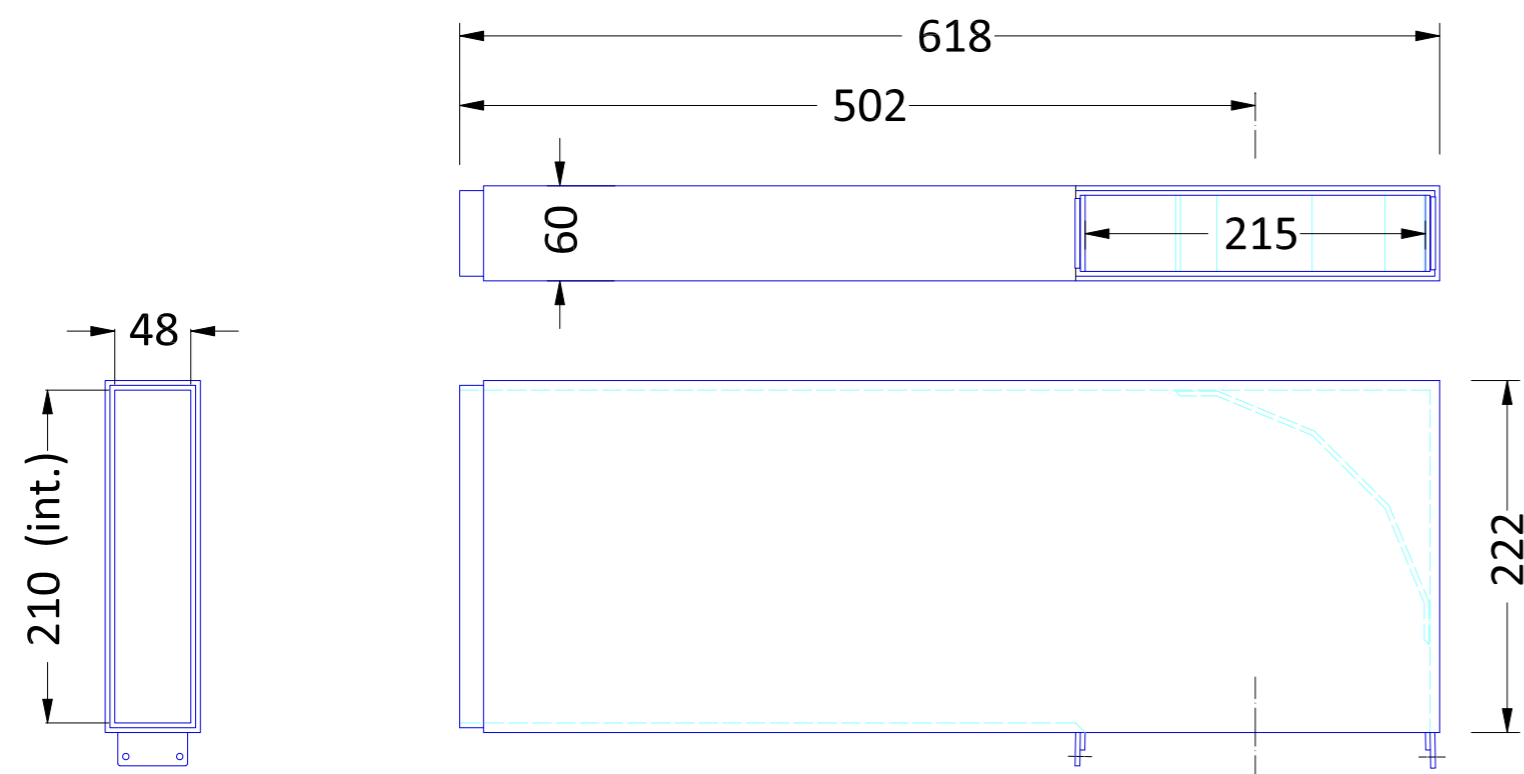

Fitting section

Fitting in PVC RAL7035, thickness 3 mm, with polyethylene external insulation, clear foam, thickness 3 mm

The fitting should be used with the reveal kit (see the code below) and also includes 4 screws and 1 strip of adhesive tape so it can be fixed onto the reveal kit. During set-up, remove the polystyrene cap from the reveal kit, after manually drilling a hole at the centre to assist with operation, and place it onto the opening of the fitting. The grille on the opening is the one contained in the reveal kit as standard, or a stainless one (the latter should be ordered separately).

90° fitting with related low reveal kit, code VMKSA-60FLATSW2 in right (on top) or left configuration (below), with set-up possible directly on site as the fitting is “reversible”.

